

MTL 3145 (I & II Pole) Class II

Cost effective surge protection
to cope with secondary currents
as described in IEC 61312

- Space saving design, DIN-rail mounting
- Full range of AC mains power applications
- Coordinated surge protection to IEC 61312;
rated according to IEC 61643
- UL1449 3rd Edition, Type 4 Recognized
Component, VZCA2 & VZCA8, File E315539
- 200kA Short Circuit Current Rating



The MA3100 range offers cost effective, DIN rail mounted, surge protection for applications described by IEC 61312 The Class II range of surge arrestors fit in to the cascade philosophy along side Class I & Class III devices.

All modules are DIN rail mounted for ease of installation and have very small footprints therefore minimising the space required. Each device is simply connected in parallel with the power.

The Class II surge current arrester is designed to work as both a standalone device and in cascade coordination with Class I lightning arrester. A single width module withstands surge currents up to 40,000A with an 8/20µs waveform. Class II arresters are available in


single width modules for maximum user flexibility, double width modules for all-mode protection on single phase systems and quad width modules for all-mode protection on three phase systems. The Class II modules have remote monitoring capabilities as a standard feature. Voltage free, normally open, normally closed contacts can be used for a variety of monitoring tasks.

The MA3145 Class II surge current arrester has a Short Circuit Current rating (SCCR) of 200kA which removes the need for external fusing and reduces installation cost.

Coordinated IEC 61643 Class I, Class II and Class III surge protection

The MA3100 range offers cost effective surge protection for applications described by IEC 61312, where the AC mains supply can carry a partial share of the lightning surge current. Class I surge protectors (rated according to IEC 61643) are designed to carry up to 50kA (10/350µs). Class II surge protectors are characterized by their ability to protect against 8/20µs impulses up to 40kA, possibly resulting from the operation of a class I device. Finally Class III devices are used to protect individual pieces of equipment. An excellent example of a class III device is the MA15.

Cascade Effect Example

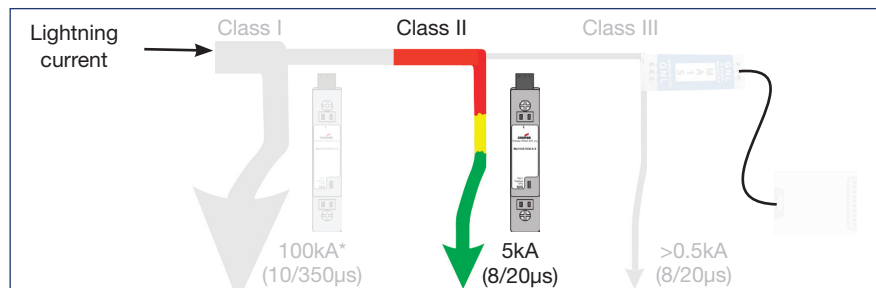


*Total over a 3 phase system

MTL MA3145 (I & II Pole) Class II


September 2016

TN-C-S System




MA3145-230-1-R OR MA3145-230-2-R

Variations for IT



Variations for TT



Class II Surge Protection Device

Technical data	MA3145	120-1-R	230-1-R	120-2-R	230-2-R
Dimensions (see Fig. 1 for A and B)	A (1 pole)	A (1 pole)	B (2 pole)	B (2 pole)	
IEC category/VDE requirement class:	II/C	II/C	II/C	II/C	
Nominal voltage U_n :	120V AC	230V AC	120V AC	230V AC	
Max. continuous operating voltage U_c :	150V AC	270V AC	150V AC	270V AC	
Lightning test current I_{imp} (10/350μs)					
	peak value/charge:	15kA	15kA	15kA	15kA
	Q charge:	7.5As	7.5As	7.5As	7.5As
Leakage current to PE at U_n :	≤0.3mA	≤0.3mA	≤0.3mA	≤0.3mA	
Nominal discharge surge current I_n (8/20μs):	20kA	20kA	20kA	20kA	
Max. discharge surge current I_{max} (8/20μs):	40kA	40kA	40kA	40kA	
Protection level U_p :	<1.2kV	<1.5kV	<1.2kV	<1.5kV	
Residual voltage at 5kA:	570V	880V	570V	880V	
Response time t_a :	≤25ns				
Max. required backup fuse:	N/R				
Short-circuit current rating (SCCR)	200kA AIC				
Remote indication contact:					
max. permitted operating voltage U_{max}	125V AC/110V DC				
max. permitted operating current I_{max} AC or DC	3A				
Temperature range:	-40°C to +80°C				
Protection type according to IEC 60 529/EN 60 529:	IP20				
Flammability class according to UL94:	VO				
Stripping length: Biconnect terminal blocks/ remote indicator contact:	14.5/7mm				
Torque: Biconnect term. blks./remote indicator contact:	4.5Nm/0.25Nm				
Weight (typ.):	(1 pole): 105g		(2 pole): 210g		
Approvals:					
Test standards:	UL1449 3rd Edition; IEC 61643-11:2011-03				

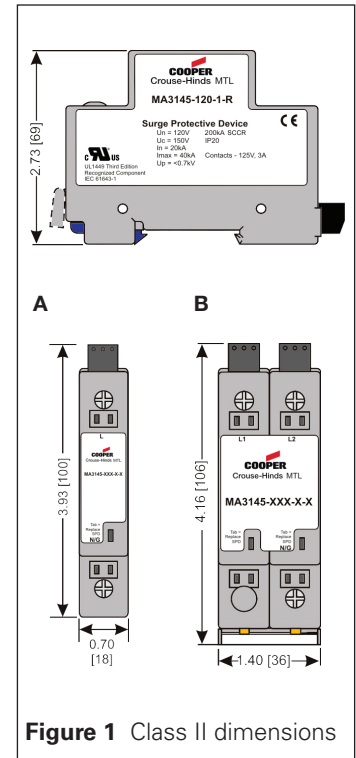


Figure 1 Class II dimensions

To order Class II surge protection devices, specify -

MA31 45 230 1 R

R = Remote contacts present

1 = 1 module width

2 = 2 module widths

120 = operating voltage

230 = operating voltage

45 = Product range

MA31 = (Product range name)



Eaton Electric Limited,
 Great Marlings, Butterfield, Luton
 Beds, LU2 8DL, UK.
 Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283
 E-mail: mtlenquiry@eaton.com
www.mtl-inst.com

© 2016 Eaton
 All Rights Reserved
 Publication No. EPS 901-173 RevC 190916
 September 2016

EUROPE (EMEA):
 +44 (0)1582 723633
mtlenquiry@eaton.com

THE AMERICAS:
 +1 800 835 7075
mtl-us-info@eaton.com

ASIA-PACIFIC:
 +65 6 645 9888
sales.mtlsing@eaton.com

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.